



DIECI PEGASUS 40.18 TELEHANDLER
WITH 600mm LOAD CENTRE FORKS
RATED CAPACITY ON RUBBER OVER FRONT

MAXIMUM ALLOWABLE WIND SPEED: 12.5m/sec (45km/h)

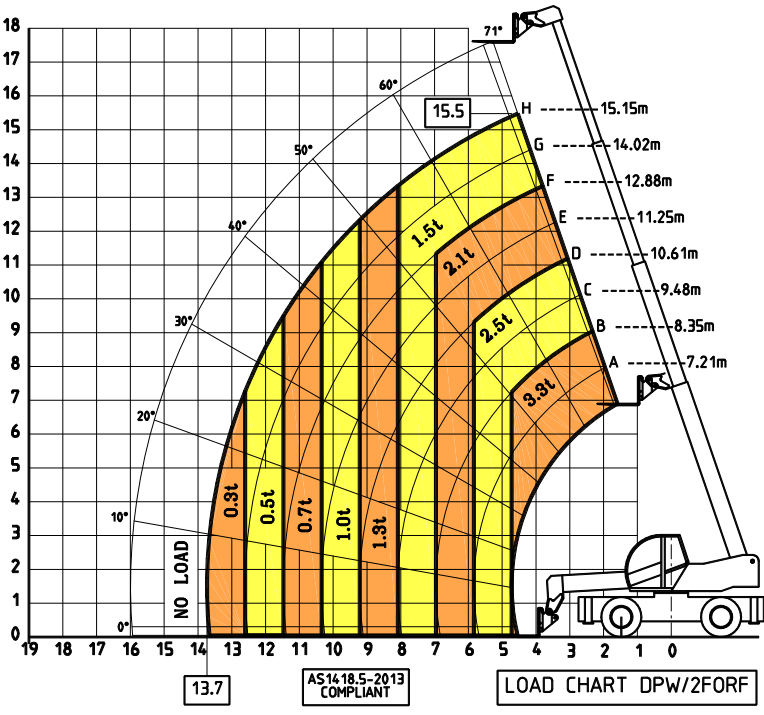


DIECI PEGASUS 40.18 TELEHANDLER
WITH 600mm LOAD CENTRE FORKS
RATED CAPACITY ON RUBBER (360°)

MAXIMUM ALLOWABLE WIND SPEED: 12.5m/sec (45km/h)

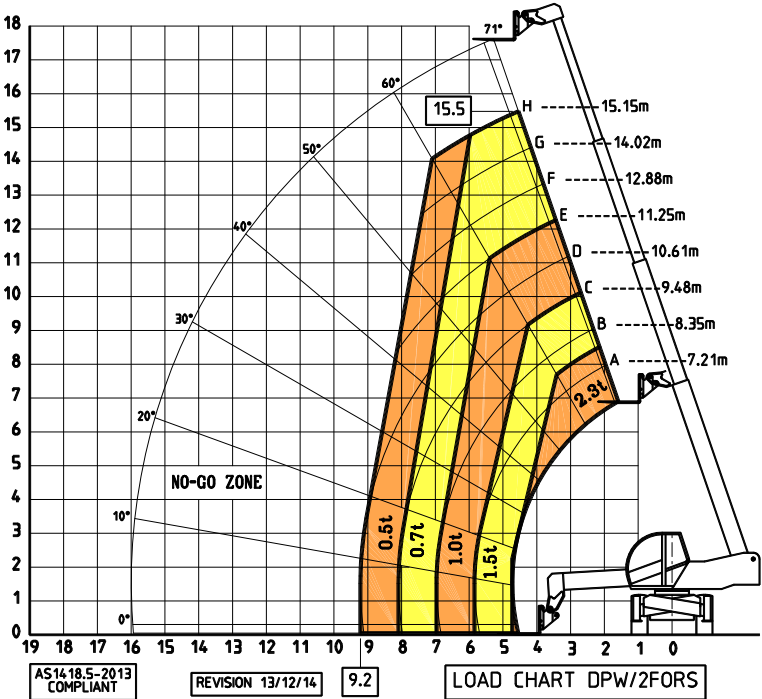

DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 600mm LOAD CENTRE FORKS #BUD1058
RATED CAPACITY ON STABILISERS (360°)

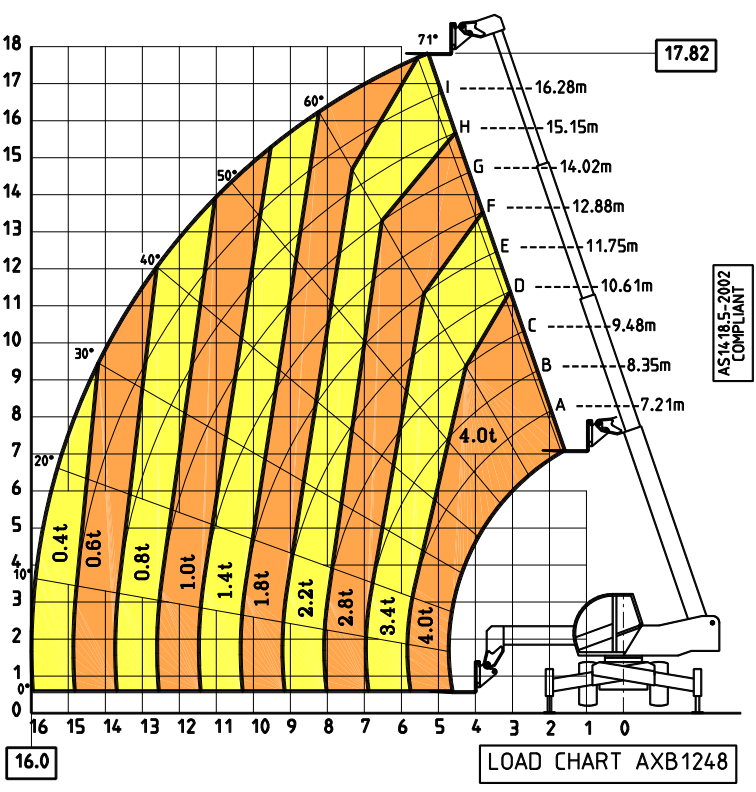


DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER WITH 600mm LOAD CENTRE FORKS #BUD1058 RATED CAPACITY STATIONARY ON RAILS (360°)

OPERATING LIMITS:

MAXIMUM BOOM ELEVATION 45°
 MAXIMUM BOOM LENGTH 9.48m (POS'N 'C')
 MAXIMUM BOOM SLEW ANGLE 360°
 MAXIMUM GRADIENT 5°
 MAXIMUM CANT 5°
 MAXIMUM WIND SPEED 12.5m/sec (45km/hr)

COMPLIANT WITH
 AS1418.5-2013


VALID FOR STANDARD
 & BROAD GAUGE ONLY

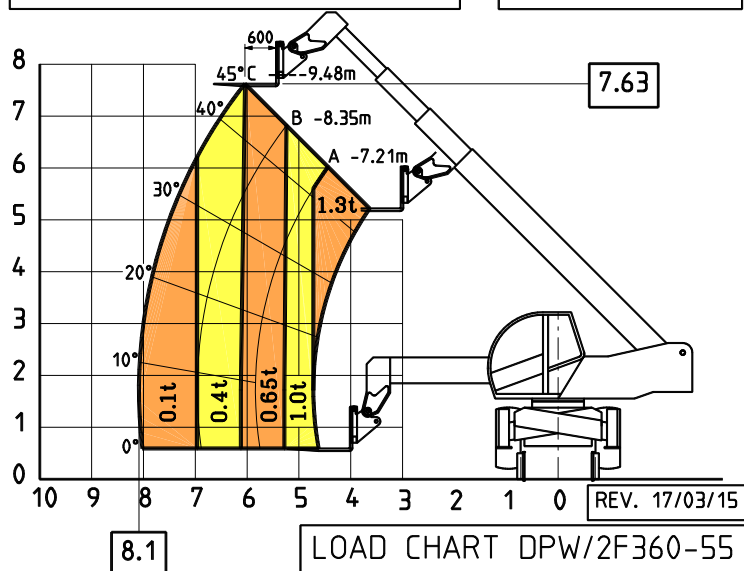

DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 600mm LOAD CENTRE FORKS #BUD1058
RATED PICK & CARRY CAPACITY ON RAILS


OPERATING LIMITS:

MAXIMUM BOOM ELEVATION 0°
MAXIMUM BOOM LENGTH 6.08m (FULLY RETRACTED)
MAXIMUM BOOM SLEW ANGLE 0°
MAXIMUM GRADIENT 5°
MAXIMUM CANT 5°
MAXIMUM CLEARANCE - RAILS TO BOTTOM OF LOAD: 30cm

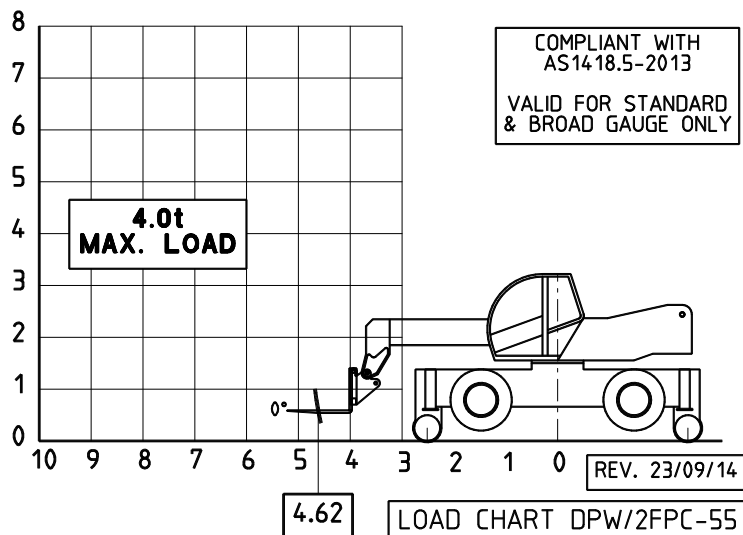

DIECI PEGASUS 40.18 TELEHANDLER
WITH TRI-LATERAL EXTENDING 300kg BASKET
RATED CAPACITY ON STABILISERS (360°)

MAXIMUM ALLOWABLE WIND SPEED: 12.5m/sec (45km/h)

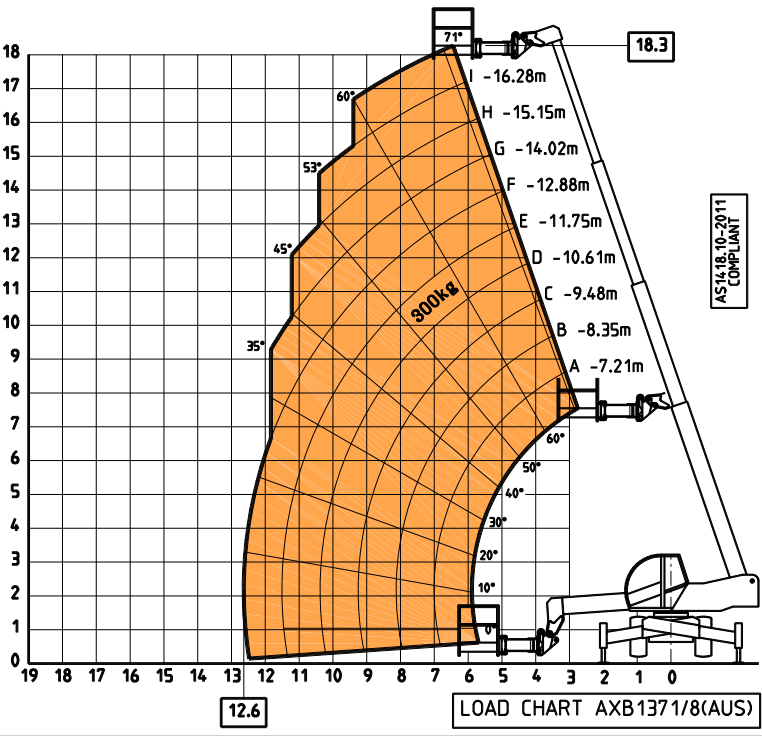


DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 300kg CAPACITY TRILATERAL EXTENDING EWP
RATED CAPACITY STATIONARY ON RAILS 360°

OPERATING LIMITS:

MAXIMUM BOOM ELEVATION 50°
MAXIMUM BOOM LENGTH 8.35m (POS'N "B")
MAXIMUM GRADIENT 5°
MAXIMUM CANT 5°
MAXIMUM WIND SPEED 12.5m/sec (45km/hr)


COMPLIANT WITH
AS1418.10-2011
VALID FOR STANDARD
& BROAD GAUGE ONLY

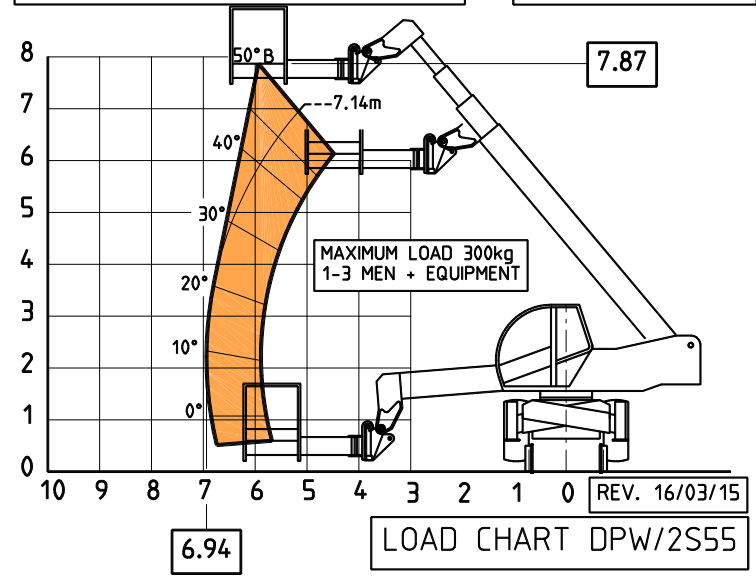

DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 300kg CAPACITY TRILATERAL EXTENDING EWP
RATED CAPACITY CREEPING ON RAILS


OPERATING LIMITS:
MAXIMUM BOOM ELEVATION 50°
MAXIMUM BOOM LENGTH 8.35m (POS'N "B")
MAXIMUM BOOM SLEW ANGLE + - 45°
MAXIMUM GRADIENT 5°
MAXIMUM CANT 5°
MAXIMUM WIND SPEED 12.5m/sec (45km/hr)

COMPLIANT WITH
AS1418.10-2011
VALID FOR STANDARD
& BROAD GAUGE ONLY

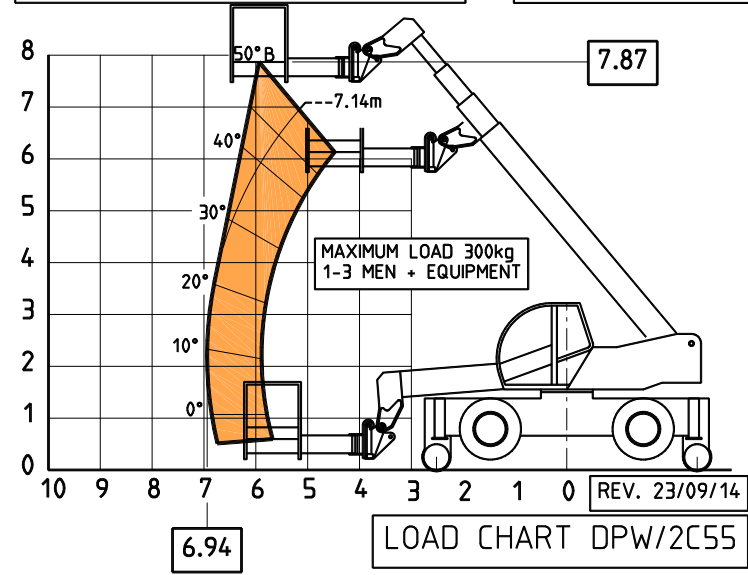


DIECI PEGASUS 40.18 TELEHANDLER WITH 4t RHINO HOOK RATED CAPACITY ON RUBBER OVER FRONT

MAXIMUM ALLOWABLE WIND SPEED: 12.5m/s (45km/h)

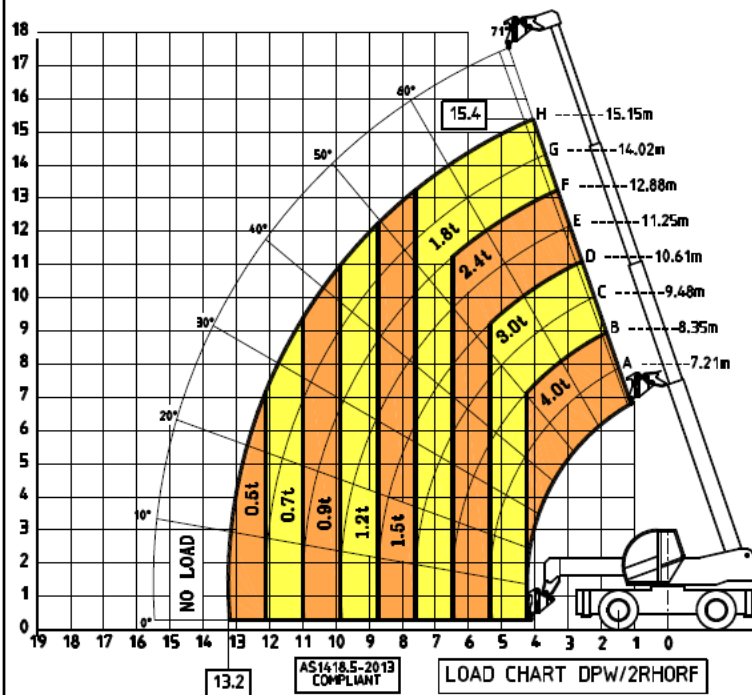


DIECI PEGASUS 40.18 TELEHANDLER
WITH 4t RHINO HOOK #BCN5370
RATED CAPACITY ON RUBBER (360°)

MAXIMUM ALLOWABLE WIND SPEED: 12.5m/sec (45km/h)

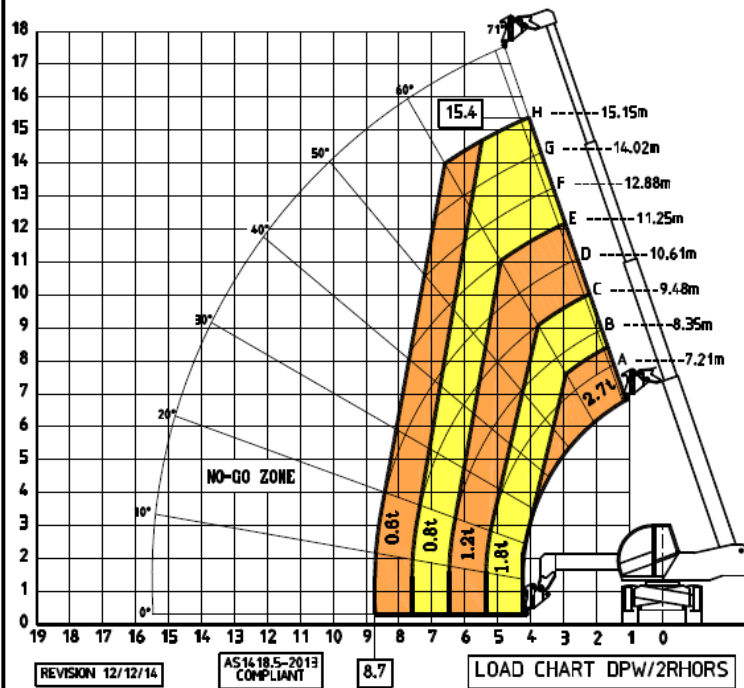

DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 4t CAPACITY RHINO HOOK #BCN5370
RATED CAPACITY ON STABILISERS (360°)

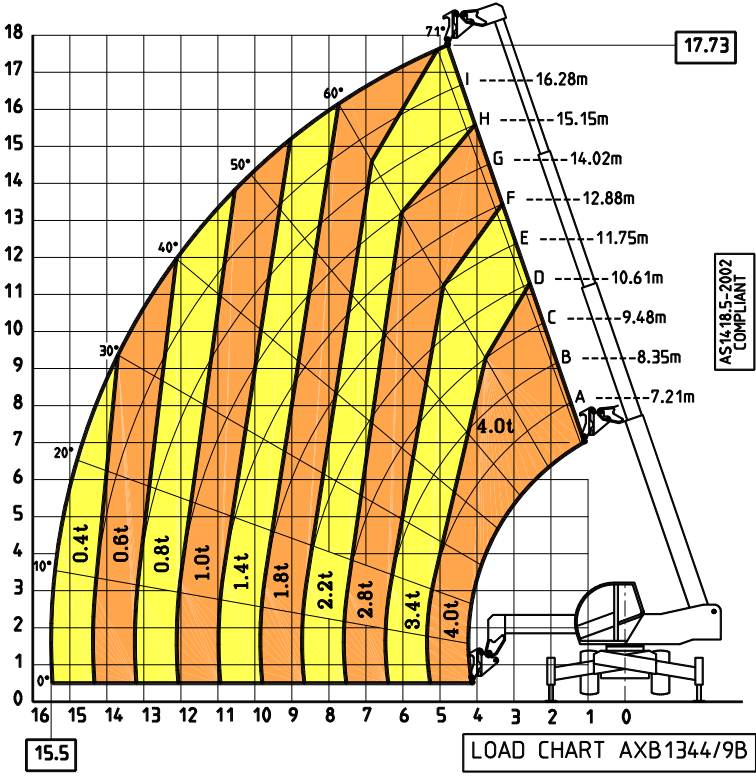


DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER WITH 4t CAPACITY RHINO HOOK #BCN5370 RATED CAPACITY STATIONARY ON RAILS (360°)

OPERATING LIMITS:

MAXIMUM BOOM ELEVATION 45°
 MAXIMUM BOOM LENGTH 9.48m (POSITION "C")
 MAXIMUM BOOM SLEW ANGLE 360°
 MAXIMUM GRADIENT 5°
 MAXIMUM CANT 5°
 MAXIMUM WIND SPEED 12.5m/sec (45km/hr)


AS1418.5-2013
 COMPLIANT

VALID FOR
 STANDARD & BROAD
 GAUGE ONLY

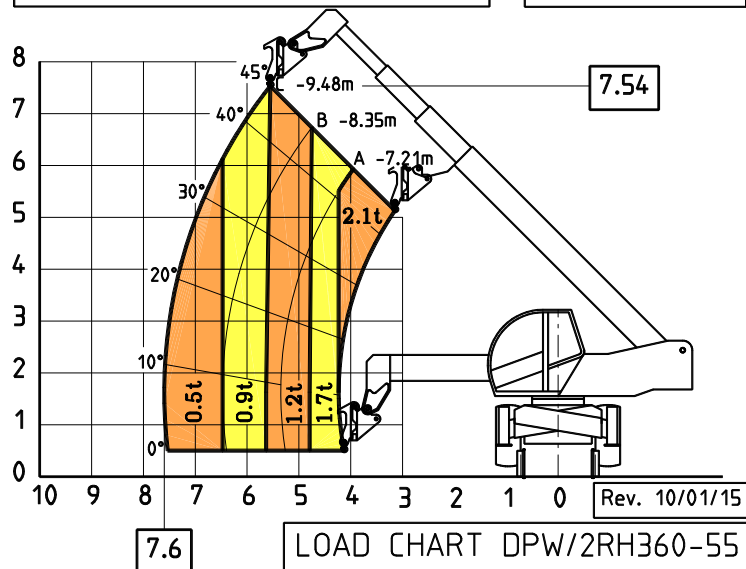


DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 4t CAPACITY RHINO HOOK #BCN5370
RATED PICK & CARRY CAPACITY ON RAILS

OPERATING LIMITS:
MAXIMUM BOOM ELEVATION 45°
MAXIMUM BOOM LENGTH 6.08m (FULLY RETRACTED)
MAXIMUM BOOM SLEW ANGLE 0°
MAXIMUM GRADIENT 5°
MAXIMUM CANT 5°
MAXIMUM CLEARANCE - RAILS TO BOTTOM OF LOAD: 30cm

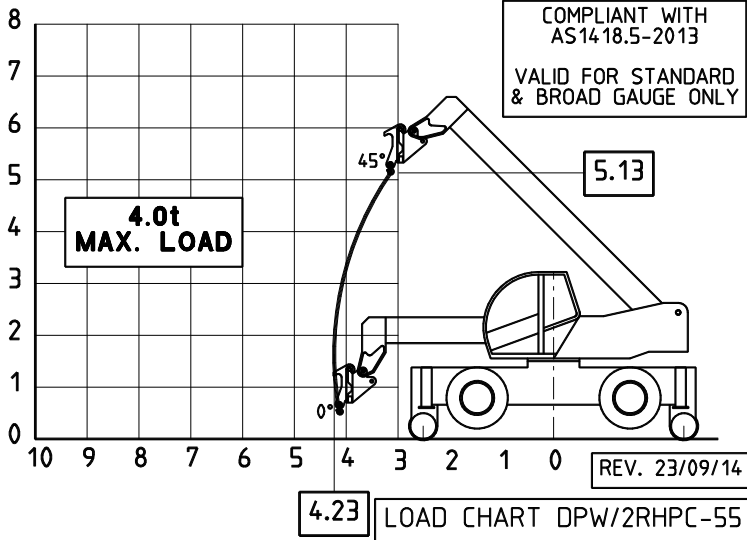


DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 1.4m LATTICE JIB #BUD4362 +2t WINCH
RATED CAPACITY ON STABILISERS (360°)

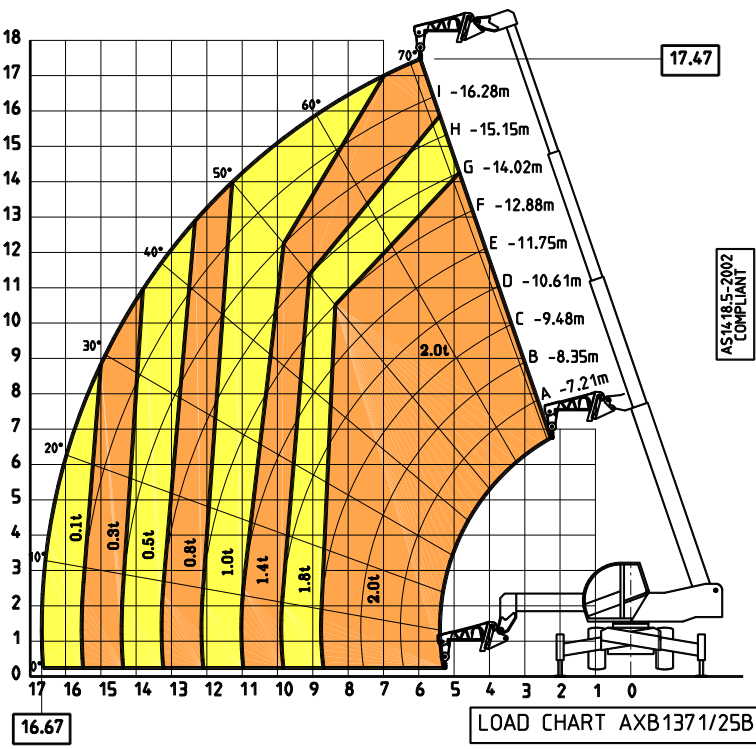


DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 1.4m LATTICE JIB #BUD4362 + 2t WINCH
RATED PICK & CARRY CAPACITY ON RAILS

OPERATING LIMITS:
MAXIMUM BOOM ELEVATION 45°
MAXIMUM BOOM LENGTH 6.08m (FULLY RETRACTED)
MAXIMUM BOOM SLEW ANGLE 0°
MAXIMUM GRADIENT 5°
MAXIMUM CANT 5°
MAXIMUM CLEARANCE - RAILS TO BOTTOM OF LOAD: 30cm

COMPLIANT WITH
AS1418.5-2013
VALID FOR STANDARD
& BROAD GAUGE ONLY

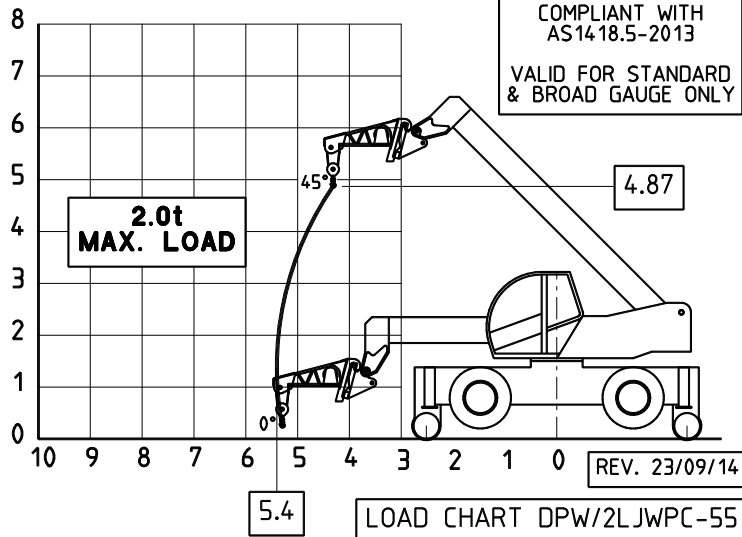

DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 1.3m BOX JIB #BUD4356
RATED CAPACITY ON STABILISERS (360°)

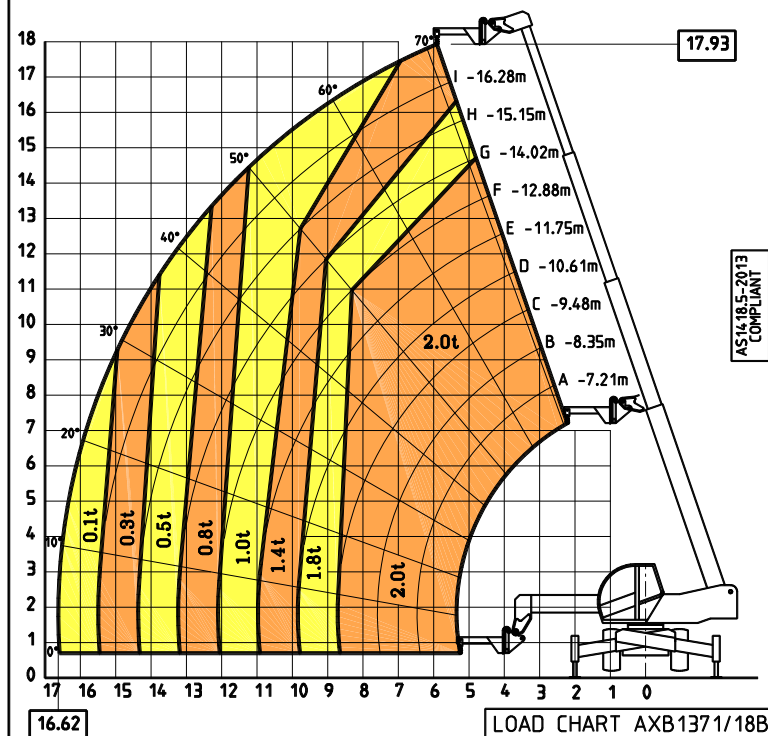


DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 1.3m JIB #BUD4356
RATED CAPACITY STATIONARY ON RAILS (360°)

OPERATING LIMITS:

MAXIMUM BOOM ELEVATION 45°
MAXIMUM BOOM LENGTH 9.48m (POSITION "C")
MAXIMUM BOOM SLEW ANGLE 360°
MAXIMUM GRADIENT 5°
MAXIMUM CANT 5°
MAXIMUM WIND SPEED 12.5m/sec (45km/hr)

COMPLIANT WITH
AS1418.5-2013

VALID FOR STANDARD
& BROAD GAUGE ONLY

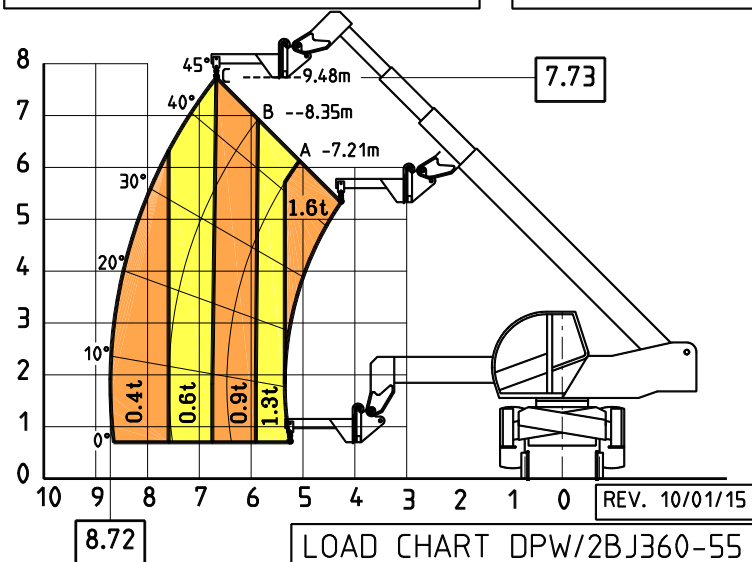

DIECI PEGASUS 40.18 HI-RAIL TELEHANDLER
WITH 1.3m JIB #BUD4356
RATED PICK & CARRY CAPACITY ON RAILS

OPERATING LIMITS:
MAXIMUM BOOM ELEVATION 45°
MAXIMUM BOOM LENGTH 6.08m (FULLY RETRACTED)
MAXIMUM BOOM SLEW ANGLE 0°
MAXIMUM GRADIENT 5°
MAXIMUM CANT 5°
MAXIMUM CLEARANCE - RAILS TO BOTTOM OF LOAD: 30cm

